



Enviro-Equipment Inc.
10120 Industrial Drive
Pineville NC 28134

Stock#: 399

Status: In Stock, Needs Refurbished (internal glass cleaning)

Dimensions: 6" x 5" x 3"

Weight: 3 lbs

Description: Erdco See-Flo Flowmeter


Model: 3214-04T6

Serial: 972653

Range: 3 – 30 GPM

Pipe Diameter: 1"

Fluid: Water

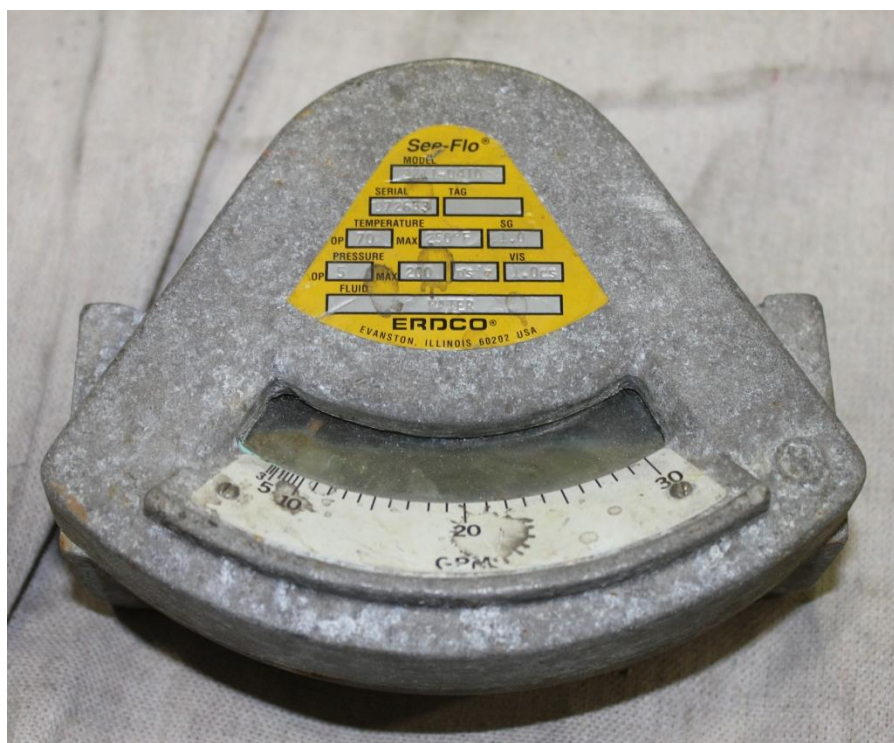



See-Flo® Meters indicate flow rate and permit visual inspection of water, air or other transparent fluids. For general purpose industrial service, See-Flo® meters handle a wide range of process fluids in vertical or horizontal piping runs.


The wedge shape of the meter housing makes See-Flo® practically self-cleaning. Where periodic maintenance might be necessary, the tempered glass window is easily removed and replaced.

Features

- Instantaneous flow rate measurement.
- Observe fluid conditions for color, clarity and flow.
- Use in horizontal or vertical piping systems.
- Individually calibrated for fluid and operating conditions.
- User selectable 10:1 turndown flow ranges.
(See Meter Rangeability Sizing Tables)
- User selectable units of measure including dual units of measure.
- No floats to get stuck, tubes to break or dynamic seals to leak.
- Low pressure loss.
- Simple design with few parts for long service life.


Principle of Operation

See-Flo® meters are variable area flow rate meters. The internal volume of the housing enlarges from the inlet to the outlet. The primary element is a tempered alloy vane with one end affixed to the apex of the meter housing. As the flow rate changes, the vane is flexed in indirect proportion.



The ½", ¾", and 1" connections typically have female threaded ends. Sizes 1¼" through 6" utilize a shunt design.

This integral by-pass housing enables larger connection sizes

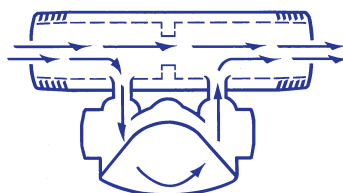

in the format of a spool with a constant 12" end to end dimension. In addition, it permits a wide variety of connection types which include threaded, flanged, grooved ends and tri-clamp.


Applications

- Water
- Air
- Nitrogen
- Vacuum service
- Other transparent liquids or gases.


Specifications

Accuracy:	± 2% full scale
Repeatability:	±1% full scale
Scales:	Direct reading
Resolution:	Maximum - 30 divisions Minimum - 15 divisions
Materials of Construction: (wetted parts)	
Housing:	aluminum, brass or 316 stainless steel
Shunt:	housing material or carbon steel
Window:	tempered glass
Vane:	17-7 ph stainless steel
"O" Rings:	Buna-n, ethylene propylene, Viton® or Kalrez®

Meters

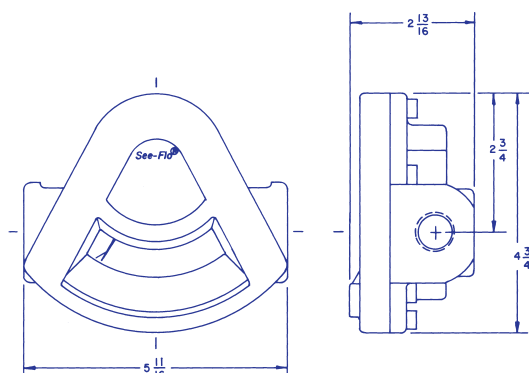 $\frac{1}{2}$ ", $\frac{3}{4}$ ", & 1" connections

1 1/4" to 6" connections

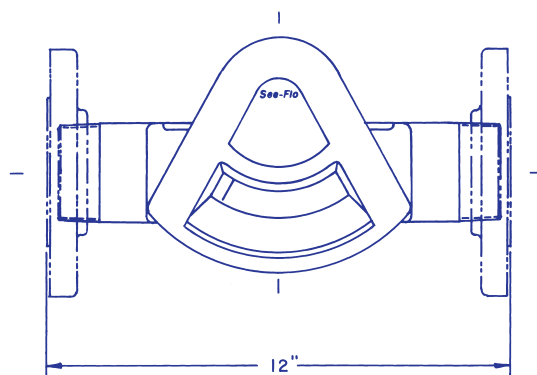

Piping Connections:

$\frac{1}{2}$ " to 1" NPT Female
 $\frac{1}{4}$ " to 4" NPT Male
 $\frac{1}{2}$ " to 3" Tri-clamp
 $\frac{1}{4}$ " to 6" Grooved
 $\frac{1}{4}$ " to 6" Beveled
 $\frac{1}{2}$ " to 6" 150#/300# RF/FF ANSI
 Flanges (carbon stl)
 $\frac{1}{2}$ " to 6" 150# RF ANSI
 Flanges (stainless steel)
 $\frac{1}{2}$ " to 6" 150#/300# RF ANSI
 Flanges (aluminum)
 $\frac{1}{2}$ " to 6" 150# FF ANSI
 Flanges (brass)
 15 to 25 mm DIN 2999/BS21/ISO R7
 Female threaded
 15 to 150 mm DIN PN 10 Flanges
 (316 stainless stl & carbon stl)

Pressure Limits: 200 psig (13.8 bar)

Temperature Limits:

-23 to 85°C (-10 to 185°F) with Teflon®
 o-ring at constant temperature conditions.
 -23 to 85°C (-10 to 185°F)
 with polycarbonate window.
 -23 to 121°C (-10 to 250°F)
 with buna-n o-ring.
 -23 to 204°C (-10 to 400°F)
 with Viton® or ethylene propylene o-ring.

Not intended for use with opaque liquids or steam. ERDCO reserves the right to alter design and/or specifications without notice. Viton® and Kalrez® are registered trademarks of E.I. duPont de Nemours and Co.

Model Number System

The example 3221-12F5 describes a 3200 Series See-Flo® meter with a brass body/carbon steel shunt for left to right flow. Connections are 3" 150# raised carbon steel flanges.

32 Series	2 Housing Material	1 Flow Direction	12 Size	F Type	5 Shunt Material
32-3200	1 -Aluminum 2 -Brass 6 -Stainless Stl	1 -L to R 2 -R to L 3 -Up 4 -Down	02 - $\frac{1}{2}$ " (15mm) 03 - $\frac{3}{4}$ " (20mm) 04 -1" (25mm) 05 -1 $\frac{1}{4}$ " (32mm) 06 -1 $\frac{1}{2}$ " (40mm) 08 -2" (50mm) 10 -2 $\frac{1}{2}$ " (65mm) 12 -3" (80mm) 16 -4" (100mm) 20 -5" (125mm) 24 -6" (150mm)	T -NPT End R -NPT Back S -Tri-clamp G -Grooved X -Beveled W -Socket End $\frac{1}{2}$ "-1" F -Flange 150#RF H -Flange 150#FF J -Flange 300#RF K -Flange 300#FF L -Flange DIN PN 10 M -Metric Thread End N -Metric Thread Back	0 -None 1 -Aluminum 2 -Brass 5 -Carbon Steel 6 -Stainless Steel