






Used Positive Displacement Blower, Sutorbilt 5MP

SPECIFICATIONS: BHC

Dimensions: 19.5" x 10.5" x 16"

Weight: 232 Lbs. (Blower Only)

Brand: Sutorbilt
Model: GAEMDPA 5MP
Max Pressure: 13 PSI
Max Vacuum: 16" HG
Max Air Flow: 542 CFM
Max T: 180° F
RPM: 764 – 2850
Inlet/Outlet: 4" FPT
Shaft Diameter: 1.125"
Drive End Lubrication: Grease
Gear End Lubrication: Oil

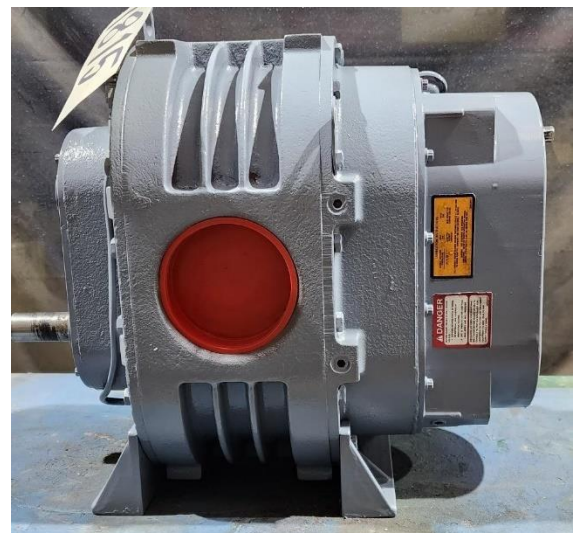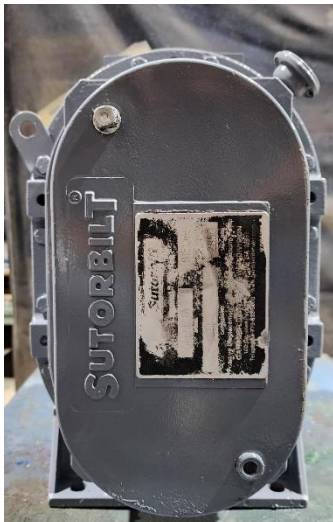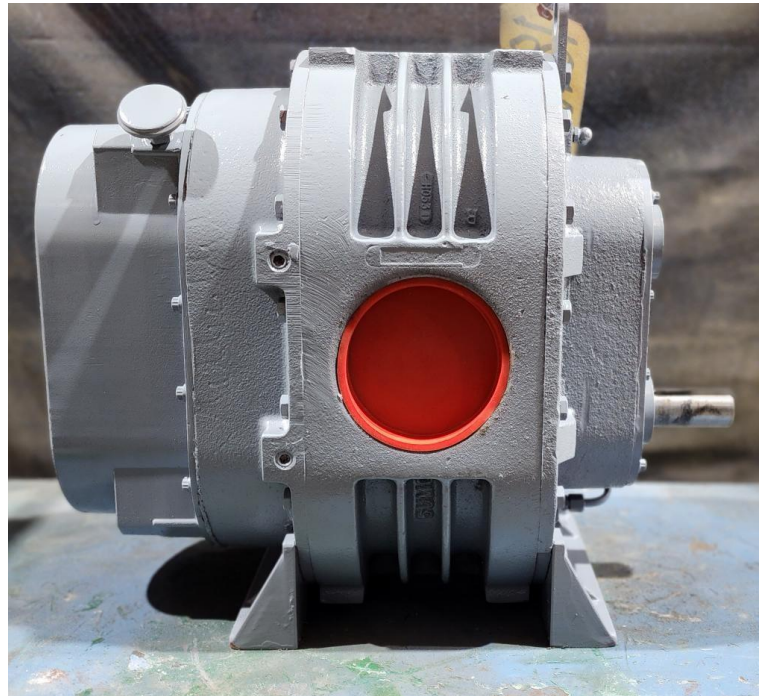



SUTORBILT MODEL NUMBERS

G A B M C S A

Column 1 and 2 are basic designators for the product group

Gear Diameter
 B = 3", C = 4", E = 5", F = 6", G = 7", H = 8"

Case Length
 L = Low Pressure, M = Medium, H = High

Configuration
 A = Vertical Unit, Top Hand Driveshaft
 B = Vertical Unit, Bottom Hand Driveshaft
 C = Horizontal Unit, Left Hand Driveshaft
 D = Horizontal Unit, Right Hand Driveshaft

Design Series
 T, S, R, P, L, F, B

	SEALS	CLEARANCES	LUBRICATION
A	Lip	Standard	Grease-Splash
B	Mechanical	Standard	Grease-Splash
C	Lip	High Temp	Grease-Splash
D	Lip	Standard	Dual-Splash
E	Mechanical	Standard	Dual-Splash
F	Lip	High Temp	Dual-Splash
G	Mechanical	High Temp	Dual-Splash

