

Enviro-Equipment Inc.  
10120 Industrial Drive  
Pineville NC 28134  
www.enviroequipment.com

Stock #2013

Dimensions: 48" Wide x 96" Long x 81" Tall and Approx 2,200 Pounds

Description: DPE / High Vacuum SVE Skid

Busch MM 1324AV Claw Blower with 3.6KW (~5HP) 3PH TEFC Motor

2" Vacuum Relief Valve

0 to 30" HG Vacuum Gauges

Solberg 2" Vacuum Filter

Piping for Connecting Vapor Carbon Tanks or Oxidizer Vapor Control Valve on Vacuum Side of Blower  
(Ball Valve, Tees, Camlocks)

AWS120-2 Aluminum Knockout Tank with Sight Glass, 3 Level Floats, 2" Dilution Valve with Filter


4 Zone Inlet Manifold Each Zone 2" With Ball Valve, Sight Glass, Vacuum Gauge, Sample Port, Male  
Camlock End Connection

Moyno 34401 Progressive Cavity Pump with 1.5HP 3PH TEFC Motor

UL 508/698 Relay Logic Weatherproof Control Panel 230V 3PH 26.3 Full Load Amps

Wired for Class 1 Div 2 Group D Hazardous Location - Outdoor/Weatherproof Installation





Enviro-Equipment Inc.  
10120 Industrial Drive  
Pineville NC 28134  
[www.enviroequipment.com](http://www.enviroequipment.com)




# MINK MM 1324/1322 AV

Dry claw vacuum pumps




VACUUM SOLUTIONS

Dimensional drawing

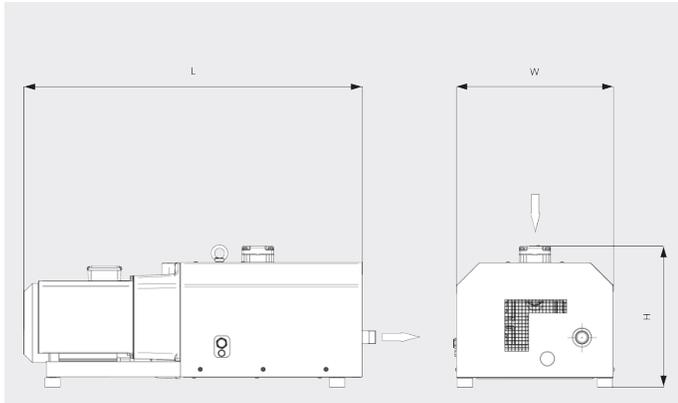

Pumping speed

Air at 70°F. Tolerance: ± 10%

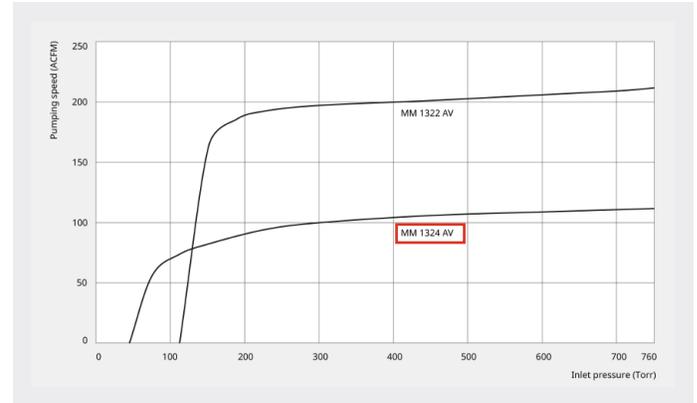

	MINK MM 1324 AV	MINK MM 1322 AV
Nominal pumping speed	112 ACFM	212 ACFM
Ultimate pressure	45 TORR	112.5 TORR
Nominal motor rating	5.6 HP	10.9 HP
Nominal motor speed	1800 RPM	3600 RPM
Noise level (ISO 2151)	74 dB(A)	82 dB(A)
Weight approx.	660 Lbs.	655 Lbs.
Dimensions (L x W x H)	44.1 x 20.4 x 17.7 inches	46.9 x 21.5 x 17.9 inches
Gas inlet / outlet	2" / 1" NPT	2" / 1¼" NPT

## DO YOU WANT TO KNOW MORE?



Get in touch with us directly!  
[info@buschusa.com](mailto:info@buschusa.com) or +1 757 463 7800



CONTACT FORM



CALL NOW

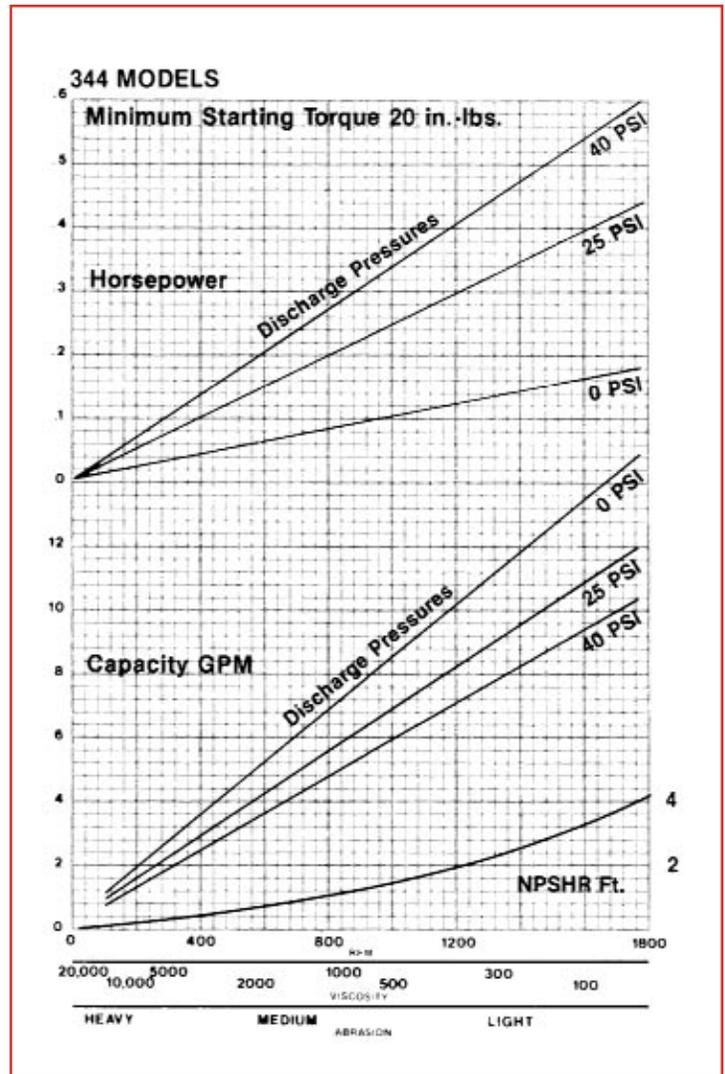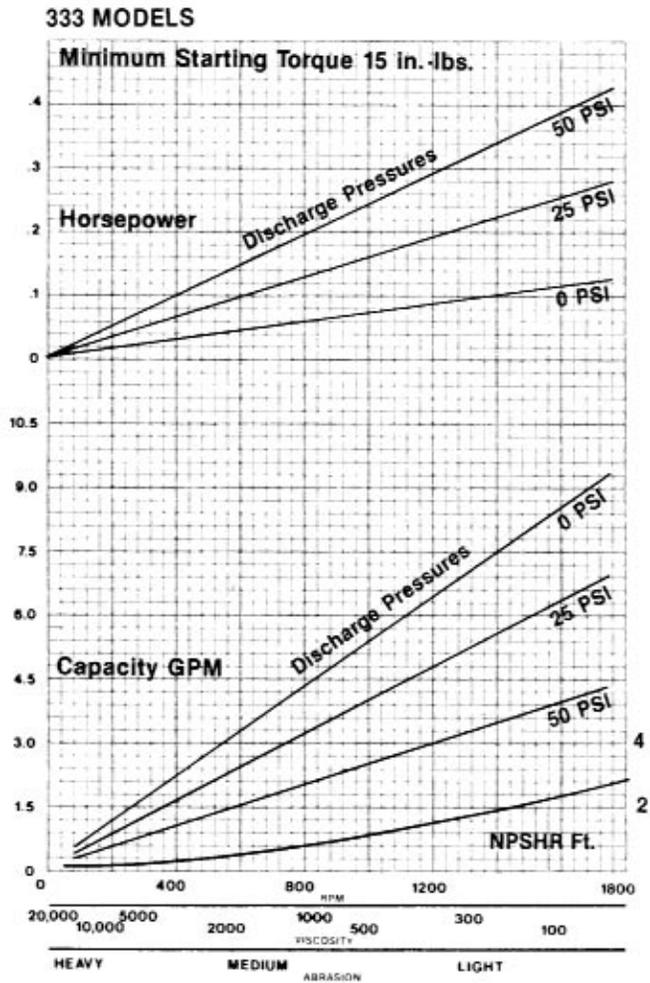

**NOTE: For fluids with viscosity over 200 CP (1000 SSU), pump capacity is reduced by 20%.**

