



Enviro-Equipment Inc.  
10120 Industrial Drive  
Pineville NC 28134

Stock#: 765

Status: In stock

Dimensions: 2 5/8" dia x 57" long

Weight: 11 lbs

Description: CEE Pump  
Similar to QED AP3 Long Top Load

3/8" inlet/outlet

1" discharge

Top fill

Composite material



# AP3T

# AutoPump®

## Top Inlet, Long

**Max. Flow** 5.4 gpm (20 lpm)

**O.D.** 3.4 in. (8.64 cm)

**Optional O.D.** 2.6 in. (6.68 cm)

**Length** 57 in. (145 cm)

### Description

The AP3T Top Inlet Long AutoPump is designed for moderate-duty remediation pumping applications with well casings 3" (7.62 cm) diameter and larger using available 2.63" (6.68 cm) inlet. It is designed for applications requiring an elevated inlet, such as pumping total fluids from wells contaminated with LNAPLs. Call QED for prompt, no-obligation assistance on your pumping project needs.

### The AutoPump Heritage


The AP3T Top Inlet Long AutoPump is part of the famous AutoPump family of original automatic air-powered pumps, developed in the mid 1980s specifically to handle unique pumping needs at remediation and landfill sites. Over the years they've proven their durability at thousands of sites worldwide. AutoPumps are designed to handle difficult pumping challenges that other pumps can't, such as solvents, suspended solids, corrosives, temperature extremes, viscous fluids and frequent start/stop cycles. Beyond just the pump, AutoPump systems offer the most complete range of tubing, hose, connectors, caps and accessories to help your installation go smoothly. This superior pumping heritage, application experience and support back up every AutoPump you put to work on your project.

### Advantages

1. Based on the original automatic air-powered well pump, proven worldwide over 25 years
2. Competitive flow rates and pumping capabilities
3. Patented, proven design for superior reliability and durability
4. Handles solids, some solvents, hydrocarbons and corrosive conditions beyond the limits of electric pumps
5. Two-year warranty



### Pump Dimensions

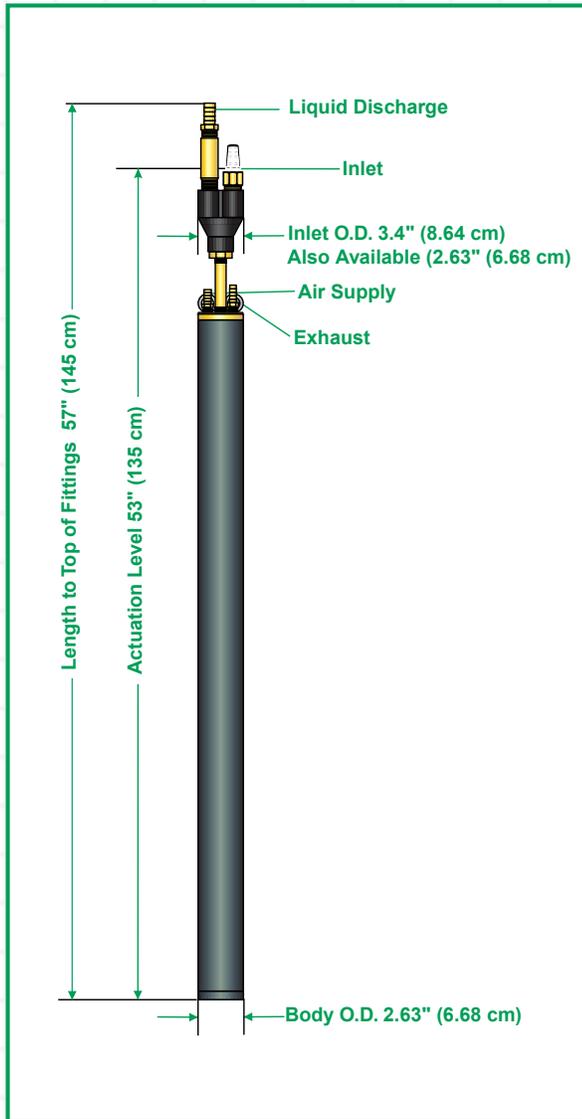

### Specifications & Operating Requirements

<b>Model</b>	<b>3" - Long AP3 Top Inlet</b>
<b>Liquid Inlet Location</b>	Top
<b>OD</b>	3.4 in. (8.64 cm) (2.63 in. Available)
<b>Length Overall (pump &amp; fittings)</b>	57 in. (145 cm)
<b>Weight</b>	11.5 lbs. (5.3 kg)
<b>Max. Flow Rate</b>	5.4 gpm (20.4 lpm) - See Flow Rate Chart
<b>Pump Volume / Cycle</b>	0.23 - 0.32 gal (0.87 - 1.21L )
<b>Max. Depth</b>	220 ft. (67 m)
<b>Air Pressure Range</b>	5 - 100 psi (0.4 - 7.0 kg/cm <sup>2</sup> )
<b>Min. Actuation Level</b>	53 in. (135 cm)
<b>Air Usage</b>	0.41 - 1.59 scf / gal.(3.0 - 11.9 liters of air / fluid liter) - See Air Usage Chart
<b>Min. Liquid Density</b>	0.7 SpG (0.7 g/cm <sup>3</sup> )
<b>Standard Construction Materials</b>	
<b>Pump Body</b>	Fiberglass or Stainless Steel
<b>Pump Ends</b>	Stainless Steel, Acetal, Brass
<b>Internal Components</b>	Stainless Steel, Viton, Acetal, Nylon
<b>Tube &amp; Hose Fittings</b>	Brass or Stainless Steel
<b>Fitting Type</b>	Barbs or Quick Connects
<b>Tube Options</b>	
<b>Tubing Material</b>	Nylon
<b>Sizes<sup>1</sup> - Liquid Discharge</b>	3/4 in. (19 mm) or 1 in. (25 mm) OD
<b>Pump Air Supply</b>	1/2 in. (13 mm) OD
<b>Air Exhaust</b>	5/8 in. (16 mm) OD

<sup>1</sup> Applies to QED supplied tubing; other tubing sources may not conform to QED fittings.

### Application Limits

AP3 AutoPumps are designed to handle the application ranges described below. For applications outside this range, consider the AP4 and AP2 models.

Maximum Temperature: 120°F (49°C)




pH Range: 4-9

Solvents and Fuels: gasoline, diesel fuel, BTEX, MTBE




AP3 AutoPumps are warranted for two (2) years: 100% materials and workmanship.

### Flow Rates<sup>1</sup>

**.75 inch (19 mm) O.D. Fluid Discharge Tubing**

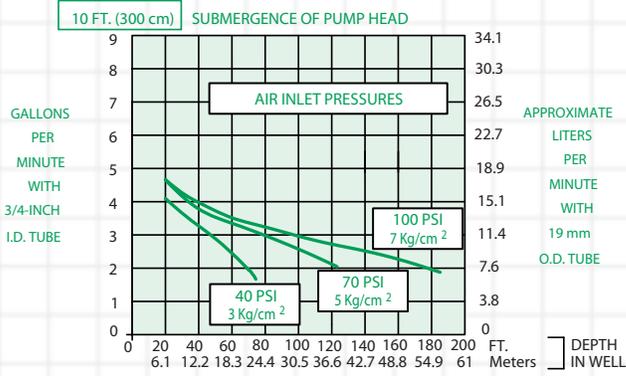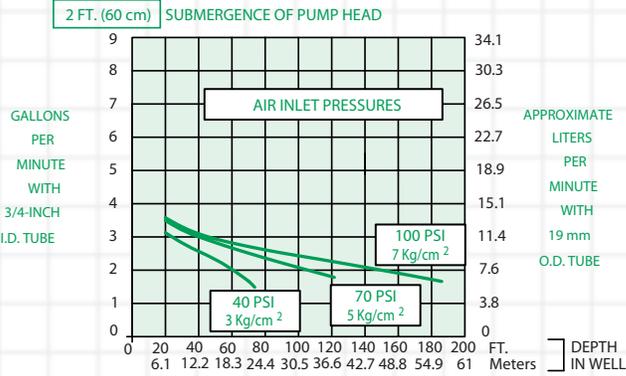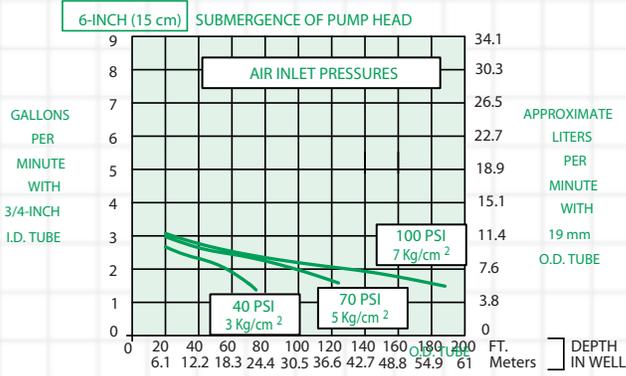

**1.00 inch (25 mm) O.D. Fluid Discharge Tubing**

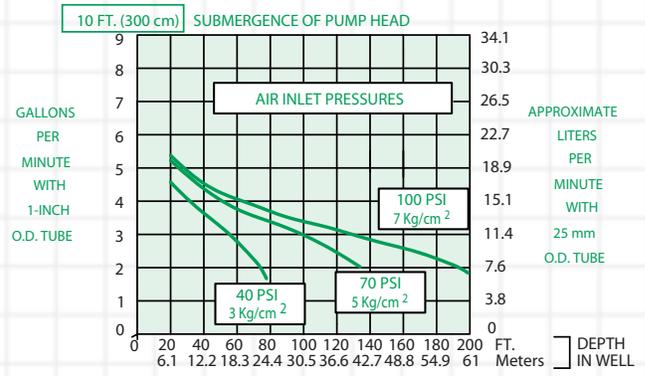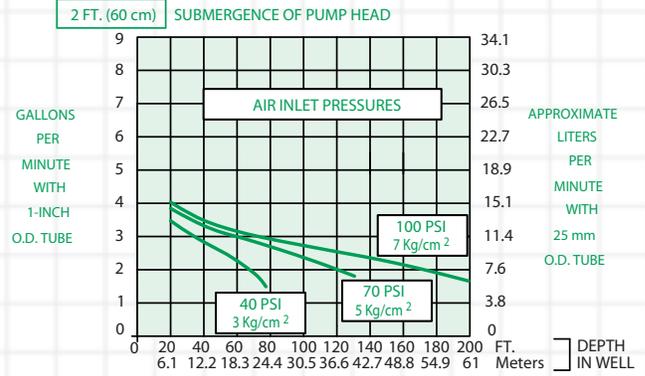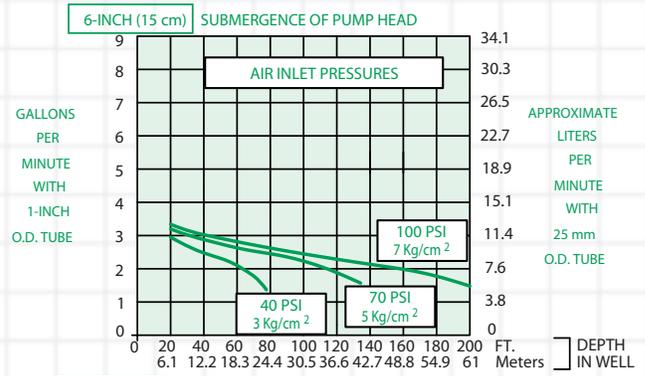


<sup>1</sup> FLOW RATES MAY VARY WITH SITE CONDITIONS. CALL QED FOR TECHNICAL ASSISTANCE.

### Air Consumption




STANDARD  
CUBIC FEET OF AIR  
PER  
GALLON PUMPED  
(SCF/GAL)

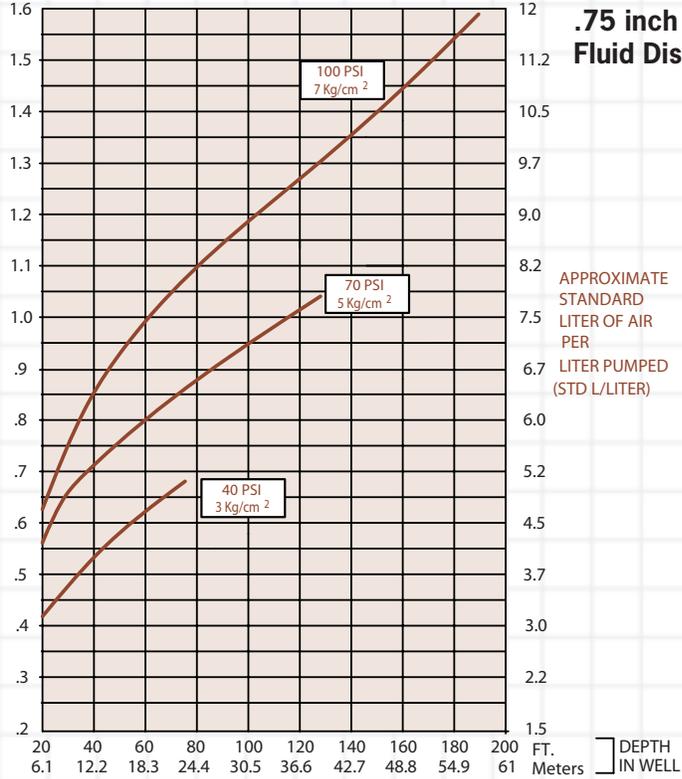

**.75 inch (19 mm) O.D.  
Fluid Discharge Tubing**

APPROXIMATE  
STANDARD  
LITER OF AIR  
PER  
LITER PUMPED  
(STD L/LITER)

STANDARD  
CUBIC FEET OF AIR  
PER  
GALLON PUMPED  
(SCF/GAL)

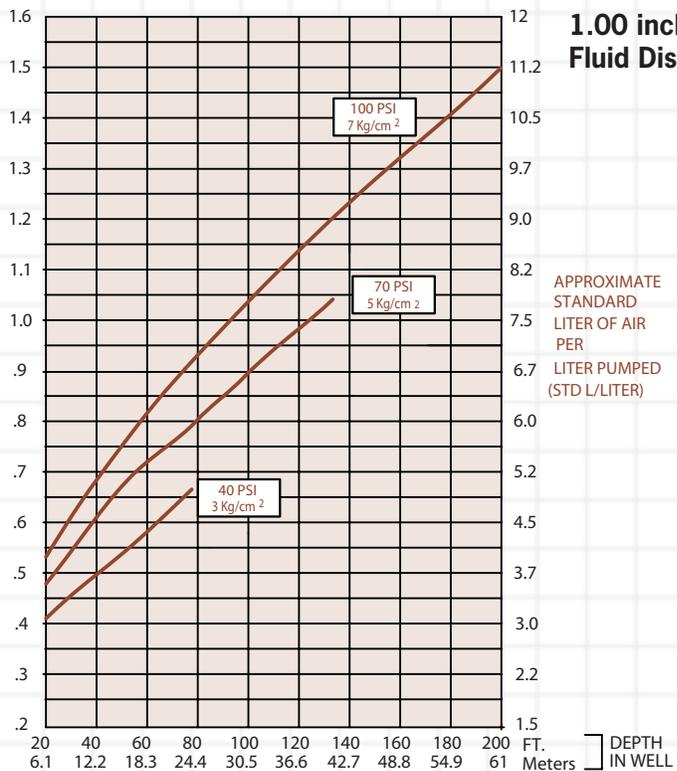

**1.00 inch (25 mm) O.D.  
Fluid Discharge Tubing**

APPROXIMATE  
STANDARD  
LITER OF AIR  
PER  
LITER PUMPED  
(STD L/LITER)