




Enviro-Equipment Inc.
10120 Industrial Drive
Pineville NC 28134

Stock#: 807

Status: In stock, Tested

Dimensions: See cut sheet

Description: Dayton 3XK37 16" Exhaust Fan with 1/4HP 1PH 115V XP Motor

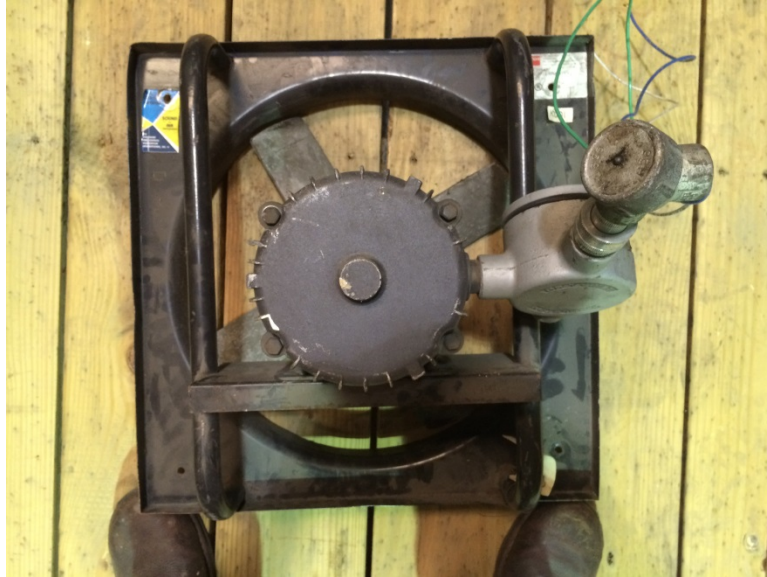



Enviro-Equipment Inc.
 10120 Industrial Drive
 Pineville NC 28134

Technical Specs

Item	Panel Exhaust Fan	Motor Enclosure	Hazardous Location Totally Enclosed Air-Over
Type	Direct Drive, Hazardous Location	Motor Insulation	Class B
Propeller Dia. (In.)	16	Max. Ambient Temp. (F)	104
CFM @ 0.000-In. SP	2662	Height (In.)	20
CFM @ 0.125-In. SP	2375	Width (In.)	20
CFM @ 0.250-In. SP	1950	Max. Depth (In.)	14 1/16
CFM @ 0.375-In. SP	1330	Venturi Clearance Dia. (In.)	18
CFM @ 0.500-In. SP	1130	Venturi Depth (In.)	2 9/16
Sones @ 0.000-In. SP @ 5 Ft.	20	Mounting Position	Horizontal or Vertical
Voltage	115/230	Flange Width (In.)	1
Hz	60	Number of Blades	4
Phase	1	Propeller Material	Fabricated Spark-Resistant Cast Aluminum
Full Load Amps	3.9/2.0	Frame Material	Steel
Watts	345	Frame Finish	Gray Baked-On Polyester
Motor HP	1/4	Agency Compliance	AMCA, UL, CUL
Bearing Type	Ball	For Use With	Class I, Group C and D, Class II, Group F and G
Motor RPM	1725	Aluminum Wall Shutter No.	4C557
Motor Type	Capacitor-Start	Intake Guard No.	6D582