



Enviro-Equipment Inc.
10120 Industrial Drive
Pineville NC 28134

Stock #1621

Dimensions: 48 x 96 x 84", 1,700 pounds

Description: Claw Vacuum (SVE/DPE) Skid

Busch 1142BV Blower with 7.5HP 3PH XP Motor

KO Tank with Demister, Cleanout, Clear PVC Sight Glass with LL HL HLA Float

Moyno 34408 Pump with 1HP 1725GPM XP Motor, Wye Strainer, Check Valve, Outlet Gate Valve, Pressure Gauge and 1" Female Camlock End Connection

2" Solberg Inline Vacuum Filter

2" Universal Dilution Filter with 2" Brass Gate Valve

Adjustable 1" Vacuum Relief Valve

2" Exhaust with Temperature Gauge, Pressure Gauge and Sample Port

4x 2" SCH 80 PVC Manifold with Sight Glasses, Vacuum Gauges, Sample Ports, 2" Male Camlock End Connections

UL 508/698 Weatherproof Control Panel, Relay Logic, 230V 3PH



MINK MM 1104–1142 BV

Claw



Discover all advantages of
the product series MINK MM

Efficient

Substantial energy savings compared to conventional vacuum generators, minimized operating costs

Nearly maintenance-free

Dry and contact-free operation

Robust


Proven design, more than 200.000 vacuum pumps in operation

MINK MM 1104–1142 BV

Claw




Dimensional drawing

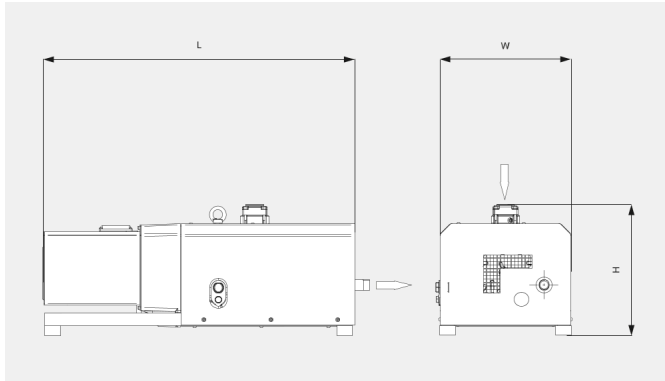

Pumping speed

Air at 70 °F. Tolerance: ± 10%

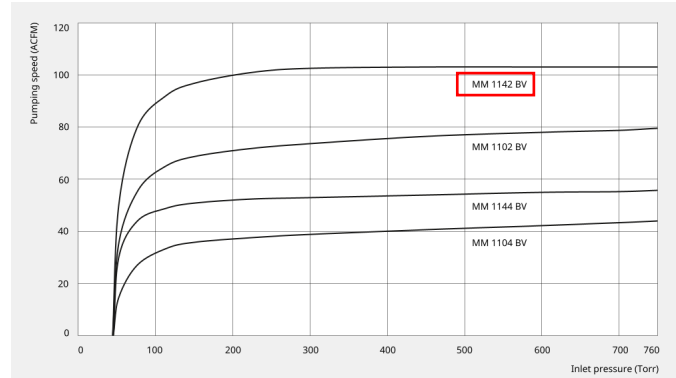

The following technical values refer to US 60 Hz

	MINK MM 1104 BV	MINK MM 1144 BV	MINK MM 1102 BV	MINK MM 1142 BV
Nominal pumping speed	44 ACFM	57 ACFM	79 ACFM	103 ACFM
Ultimate pressure	45 TORR	45 TORR	45 TORR	45 TORR
Nominal motor rating	2 HP	3 HP	4 HP	5 HP
Nominal motor speed	1800 RPM	1800 RPM	3600 RPM	3600 RPM
Noise level (ISO 2151)	70 dB(A)	70 dB(A)	79 dB(A)	79 dB(A)
Weight approx.	439 Lbs.	448 Lbs.	443 Lbs.	449 Lbs.
Dimensions (L x W x H)	39.5 x 17 x 16.1 inches	42.8 x 17.8 x 16.1 inches	42.4 x 17.8 x 16.1 inches	42.9 x 17.8 x 16.1 inches
Gas inlet	1 ¼"	1 ¼"	1 ¼"	1 ¼"
Gas outlet	1" NPT	1" NPT	1" NPT	1" NPT

DO YOU WANT TO KNOW MORE

Please contact us!
info@buschusa.com or +1-800-USA-PUMP



CONTACT FORM



CALL US NOW