



## Used Positive Displacement Blower, Tuthill 3006-21R2

### SPECIFICATIONS

**Dimensions:** 15"x16"x13"

**Weight:** 92 Lbs. Blower Only

Blower: Tuthill  
Model: 3006-21R2-x  
Serial # 663-J95  
Port Size: 2.5"  
Max Pressure: 7 psi  
Max Vacuum: 16" Hg  
Maximum RPM: 3600  
Minimum RPM: 2650






o 800 825 8937 f 417 865 2950  
tuthillvacuumblower.com

C-1602

# 3006 COMPETITOR<sup>®</sup> PRESSURE CURVE (.103 CFR DISPL. 3 LOBE)

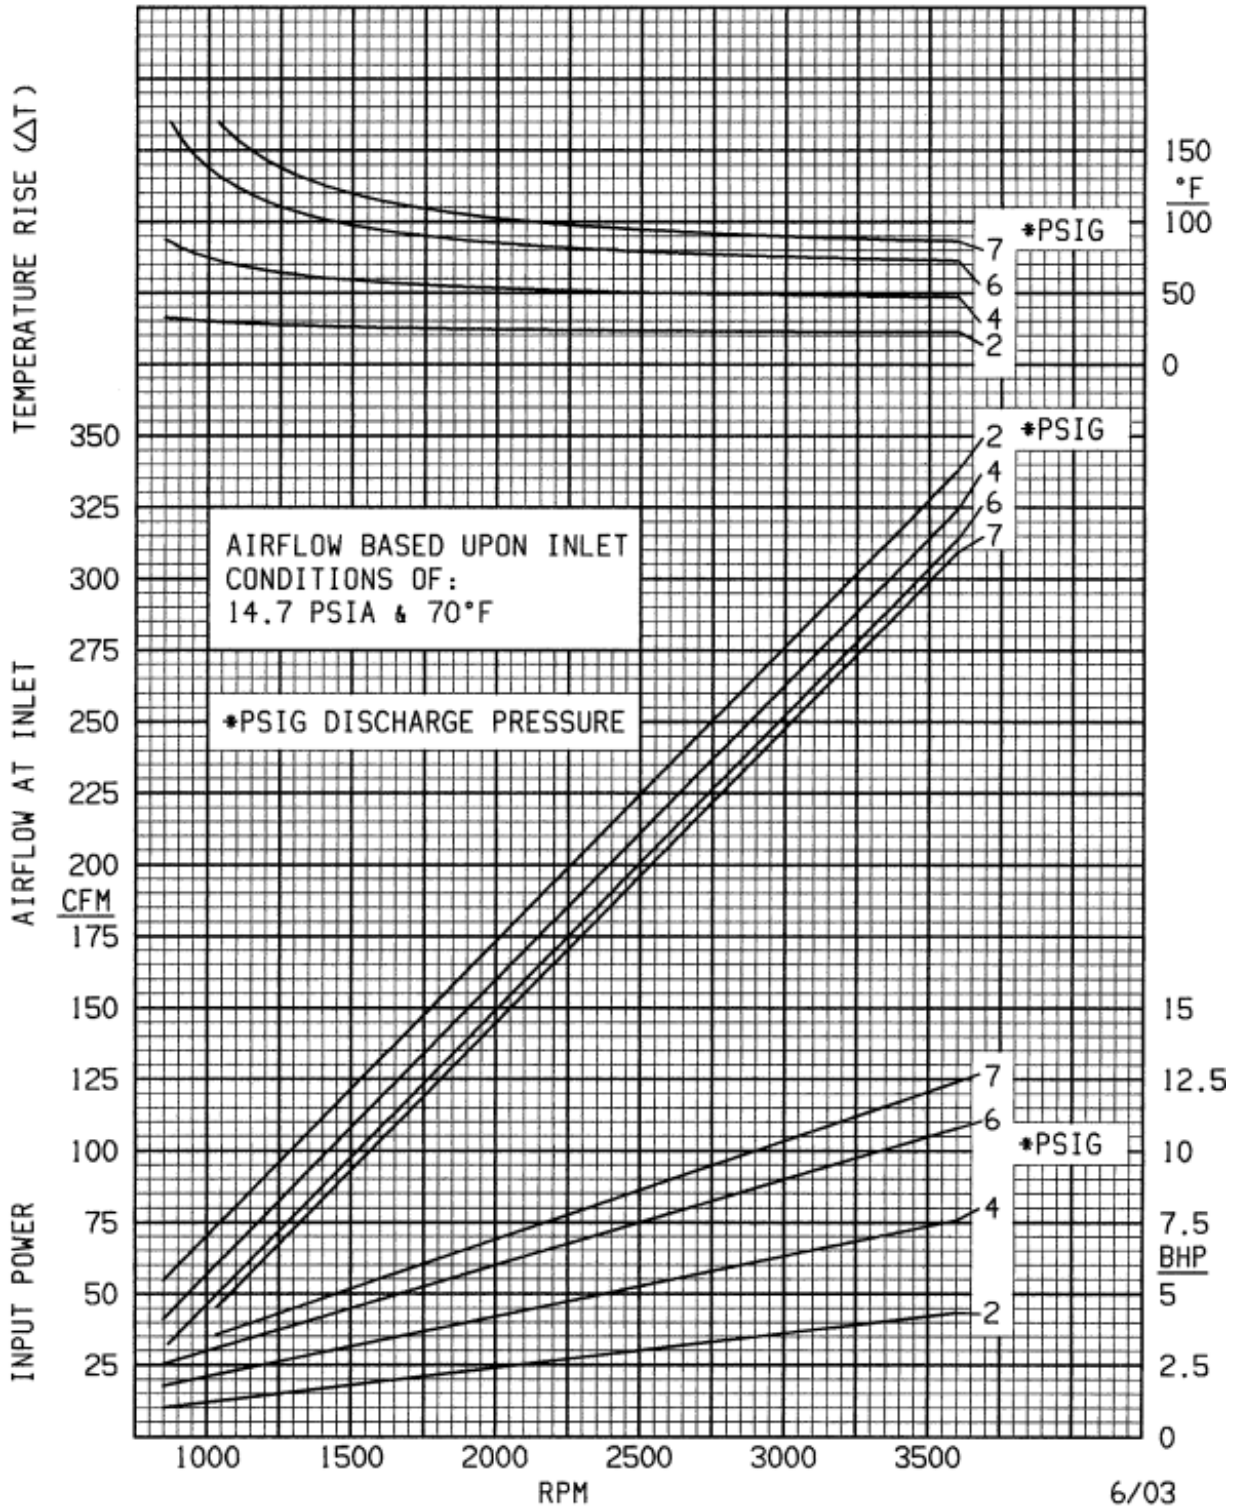




o 800.825.6937 f 417.865.2950  
tuthillvacuumblower.com

C-1603

# 3006 COMPETITOR<sup>®</sup> VACUUM CURVE (.103 CFR DISPL. 3 LOBE)

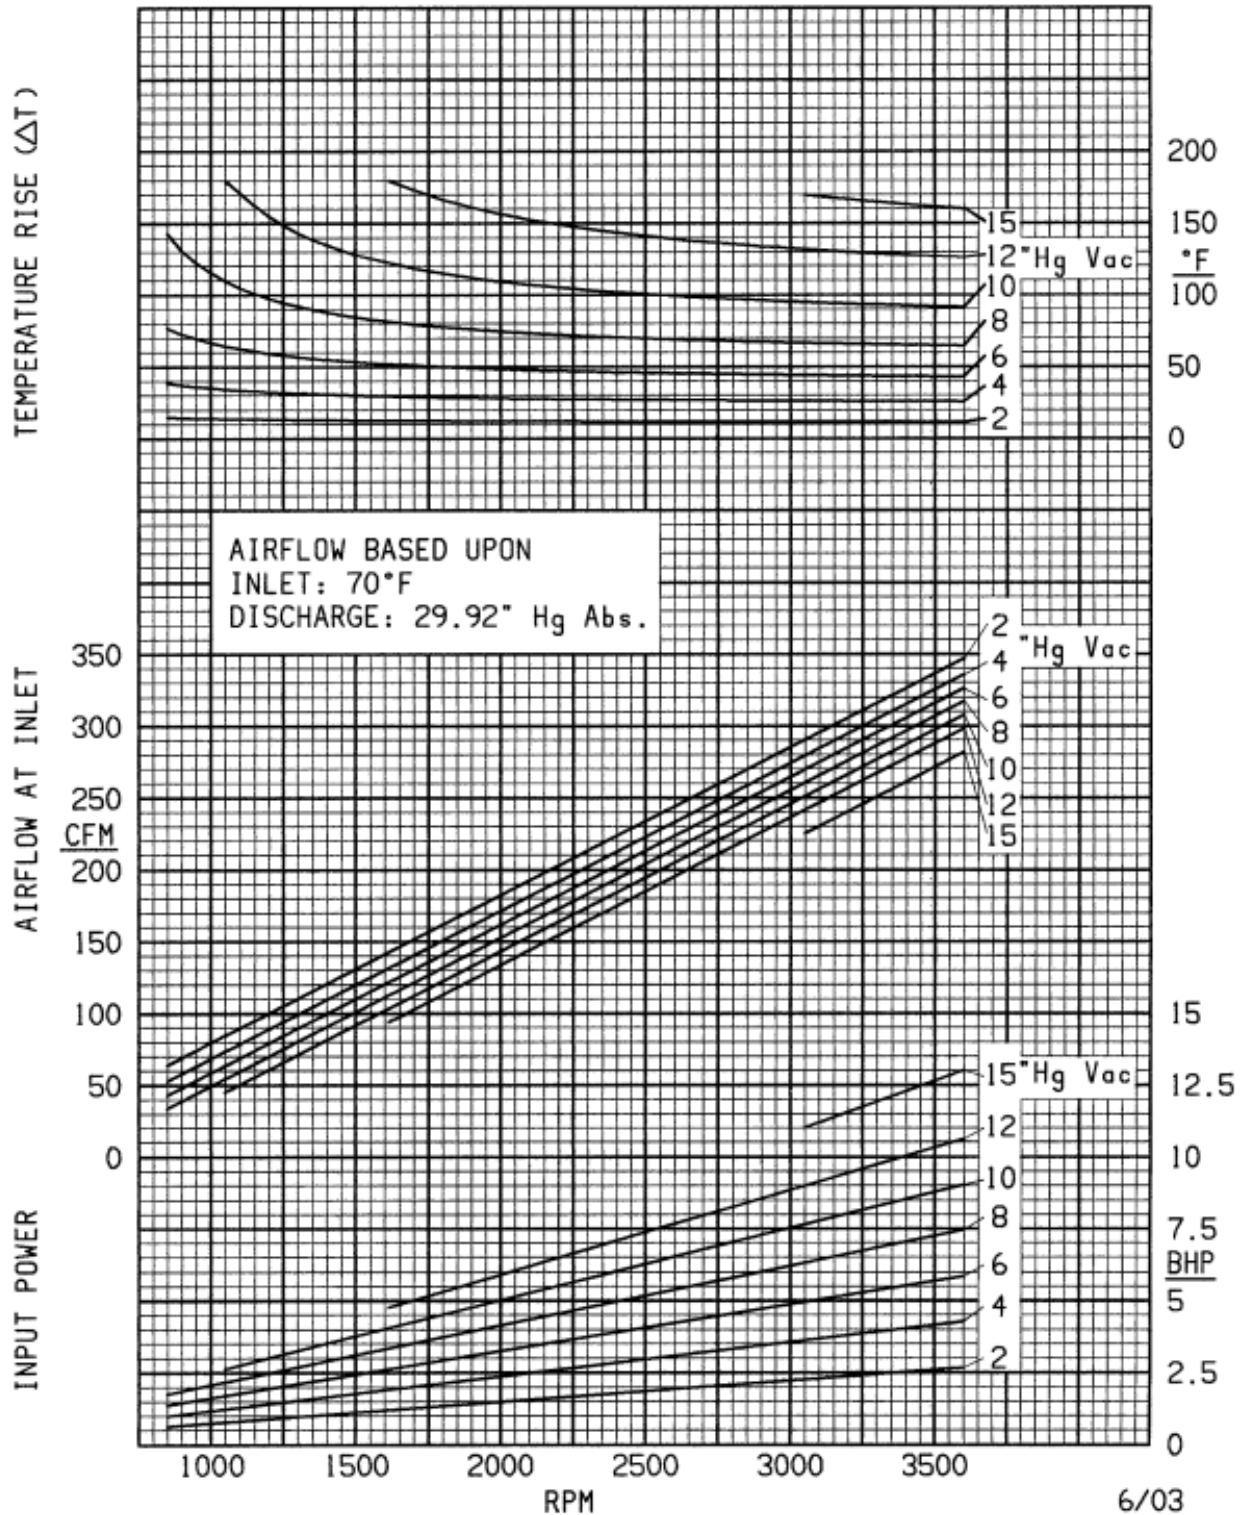



M-D Pneumatics™

## COMPETITOR® SL™

Rotary Positive Blowers

Designed with features found ordinarily on high-end blowers, **COMPETITOR SL** blowers are still designed to be interchangeable, with respect to foot print, shaft height and diameter, with equivalent sizes of Roots Universal RAI/RAI-J®, and many Sutorbilt® California Series Legend® Series L and P, as well as M-D Pneumatics **COMPETITOR PLUS™** blowers.

### Features

#### Splash Oil Lubrication at Both Ends

**COMPETITOR SL** blowers include splash oil lubrication at both the gear end and drive end of the blower. Splash lubrication provides for longer bearing and seal life through improved heat dissipation versus grease lubrication.

#### Revolutionary Noise Reduction Technology

Many sizes of **COMPETITOR SL** blowers are available with Tuthill's unique noise reduction technology with tri-lobe rotors specially designed for maximum displacement and special porting on the discharge side to significantly reduce noise.

#### Helical Gearing

**COMPETITOR SL** blowers are timed with precision helical gears, keyed to the rotor shafts, not taper fit spur gears offered by other manufacturers which have greater backlash, and can slip and lose timing. Helical gears are also quieter, further reducing mechanical noise.

#### Stronger Bearings

All **COMPETITOR SL** blowers include double-row ball bearings at the gear end, stronger than single row ball bearings offered by other manufacturers. Drive shaft bearing is cylindrical roller type for additional strength against side loading from V-belt drives. As a result of this superior design, **COMPETITOR SL** blowers offer significantly longer bearing life than models offered by other manufacturers.

#### Rotors with Integral Shafts


**COMPETITOR SL** blowers include precision machined ductile iron rotors with large, integrally cast shafts, not press fit and/or pinned shafts offered by other manufacturers, which can loosen over time and cause rotor clash.

#### Versatility

**COMPETITOR SL** blowers can be field converted from horizontal to vertical flow, or vice versa, without any special tools or additional components.

#### Metric Availability

All **COMPETITOR SL** blowers are available with metric drive shaft and process connections.

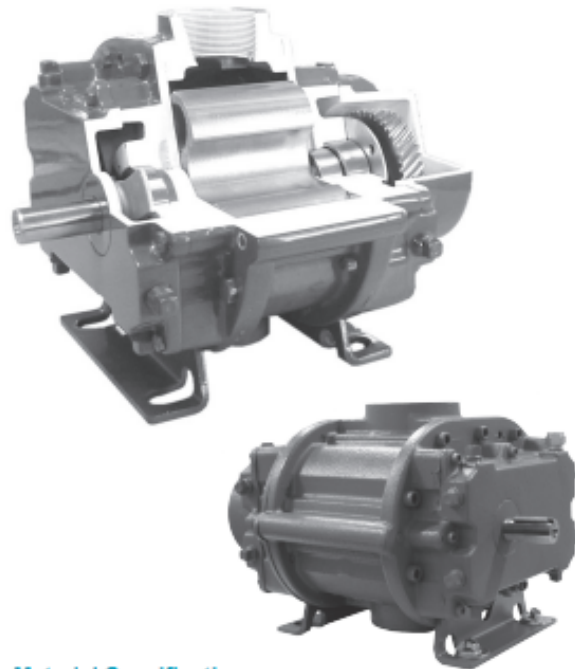

#### Material Specifications:

**Housing:** Cast iron

**End Plates:** Cast iron

**End Covers:** Cast iron

**Rotors:** Ductile iron

**Shafts:** Ductile iron cast integrally with rotors

**Bearings:** Gear end - Double row ball, both rotors  
 Drive end - Cylindrical roller on drive rotor  
 Single row ball on driven rotor

**Drive Shaft:** Ductile iron, cast integrally with drive rotor

**Gears:** Heat treated alloy steel, helical cut

**Seals:** Lip seals on rotor shafts and drive shaft

**Lubrication:** Oil splash on both ends

Model Size	Maximum Nominal Pressure (PSIG)	Maximum Nominal Vacuum (in. Hg)	Maximum RPM	Net Wgt. (lbs.)*
3002	15	16	3600	100
3003	12	15		105
3006	7	15		125
4002	15	16	3600	130
4005	10	16		165
4007	7	15		180
5003	15	16	2850	205
5006	13	16		255
5009	8	15		275
6005	15	16	2350	330
6008	14	16		400
6015	7	14		580

\*Approximate shipping weight.



All Competitor SL blowers are factory tested to meet ISO 9001 registered quality standards.  
 Rotors are dynamically balanced to meet ISO1940 Grade 6.3 specifications.






# Enviro-Equipment, Inc.

## Remediation Division

### Performance

Pressure performance is based on inlet conditions of 1.02 kgf/cm<sup>2</sup> A and 20° C. Vacuum performance is based on inlet temperature of 20° C and discharge pressure of 1.02 kgf/cm<sup>2</sup> A. In conjunction with our program of continuous testing and upgrading, all specifications are subject to change without notice. All data are approximate. Request a quotation for your specific application.

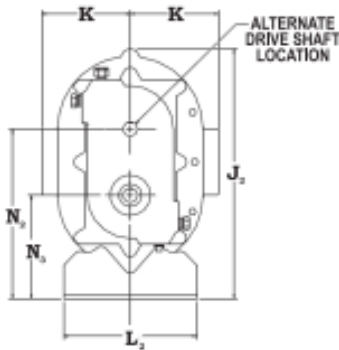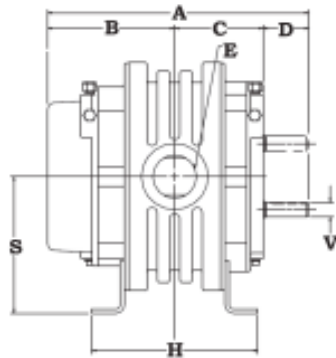

Blower Model	Style	SPEED (RPM)	7 PSIG		8 PSIG		10 PSIG		12 PSIG		13 PSIG		15 PSIG		Max. Vacuum		
			CFM	HP	CFM	HP	CFM	HP	CFM	HP	CFM	HP	CFM	HP	"Hg	CFM	BHP
3002	2 Lobe	1170	20	1.9	18	2.1									10	19.1	1.4
		1750	47	2.8	45	3.1	40	3.9							16	28.0	3.1
		3600	134	5.7	131	6.5	127	7.9	123	9.4	121	10.1	118	11.8	16	114.4	8.4
3003	2 Lobe	1170	28	2.4	61	4.1								10	28.9	1.7	
		1750	64	3.6	175	8.3	169	10.3	164	12.2				14	48.6	3.5	
		3600	178	7.4										15	157.8	7.7	
3003	3 lobe	1170	28	3.3	62	5.4								10	27.3	2.6	
		1750	65	4.9	177	11.1	171	13.0	168	15.0				14	49.3	4.9	
		3600	180	10.1										15	159.9	10.5	
3006	2 Lobe	1170	59	3.8										11	52.9	3.0	
		1750	119	5.8										15	91.3	6.1	
		3600	306	11.8										15	279.0	12.4	
3006	3 lobe	1170	59	4.7										11	52.8	3.9	
		1750	120	7.1										15	92.2	7.4	
		3600	309	14.6										15	281.7	15.2	
4002	2 Lobe	880	16	1.8	67	4.1	62	5.0	58	5.9	56	6.4		10	15.5	1.3	
		1750	70	3.6	178	8.3	174	10.2	170	12.1	168	13.1	164	15.0	14	56.5	3.5
		3600	181	7.4										16	180.6	8.2	
4005	2 Lobe	880	39	3.4	35	3.9	148	6.9	141	7.8	133	9.6		9	42.6	2.2	
		1750	146	6.9	364	15.9	355	19.7						14	121.6	6.7	
		3600	368	14.0										16	331.2	15.7	
4005	3 lobe	880	37	3.4	33	3.8								9	40.6	2.2	
		1750	139	6.7	135	7.6	128	9.4						14	116.0	6.6	
		3600	351	13.8	347	15.6	339	19.2						16	315.9	15.3	
4007	2 Lobe	880	52	4.5										10	49.4	3.2	
		1750	192	8.9										14	160.3	8.8	
		3600	486	18.3										16	436.6	20.4	
4007	3 lobe	880	49	4.4										10	47.1	3.1	
		1750	183	8.7										14	152.8	8.6	
		3600	463	17.8										16	416.0	19.9	
5003	2 Lobe	710	34	3.1	29	3.5	160	10.7	153	12.7	150	13.7		10	32.0	2.2	
		1750	172	7.6	168	8.6	160	17.2	207	20.5	204	22.2	288	25.4	14	150.5	7.5
		2850	316	12.3	312	14.0	304	17.2	304	20.5	294	22.2	288	25.4	16	282.5	13.7
5006	2 Lobe	710	65	5.0	59	5.7	279	17.5	269	20.9	264	22.6		10	62.7	3.6	
		1750	297	12.4	291	14.1	279	26.3	269	33.8	264	36.6		14	264.2	12.2	
		2850	538	20.1	532	22.8	520	26.3	510	33.8	505	36.6		16	487.3	22.5	
5006	3 lobe	710	65	5.4	59	6.1	281	18.5	270	21.9	265	23.6		10	63.0	4.0	
		1750	299	13.4	292	15.1	281	30.0	270	35.5	265	38.2		14	285.4	13.2	
		2850	540	21.7	534	24.4	522	30.0	512	35.5	507	38.2		16	489.5	24.1	
5009	2 Lobe	710	112	7.2	104	8.2								11	100.0	5.6	
		1750	451	17.9	443	20.4								14	409.4	17.6	
		2850	803	29.0	795	33.0								15	750.5	30.4	
5009	3 lobe	710	113	7.6	104	8.6								11	100.3	6.0	
		1750	453	18.9	445	21.4								14	410.7	18.6	
		2850	806	30.6	798	34.6								15	752.8	32.0	
6005	2 Lobe	700	88	5.6	82	6.4	71	7.9	322	23.6	318	25.5	309	29.3	12	71.9	4.8
		1750	348	14.2	343	16.1	332	19.9	322	26.5	318	28.5	309	29.3	16	301.5	15.8
		2350	493	18.9	488	21.5	477	26.5	467	31.6	463	34.1	454	36.1	16	446.7	21.1
6008	2 Lobe	700	141	8.8	131	10.0	114	12.4	517	37.4	510	40.4		12	115.4	7.5	
		1750	550	22.2	550	25.2	533	31.3	517	41.8	510	49.9		15	497.9	23.3	
		2350	792	29.6	783	33.7	766	41.8	750	49.9	743	53.9		16	717.2	33.1	
6015	2 Lobe	700	263	16.2										10	256.7	11.5	
		1750	1048	40.7										14	956.6	40.0	
		2350	1484	54.4										14	1392.2	53.4	

### Dimensions

Model Size	Style	A	B	C	D	E	H	J1	J2	K	L1	L2	N1	N2	N3	P	R	S	V
3002	2-lobe	11.58	5.69	3.38		1 1/2" NPT	6.75												
		12.44	6.19	3.75	2.50	2" NPT	7.83	8.94	12.81	3.94	7.25	7.25	5.00	8.50	5.00	12.19	1.75	6.75	8.75
		14.81	7.38	4.94		2 1/2" NPT	10.00												
3003	3-lobe	12.38	6.13	4.19	2.08	2" NPT	7.83	0.63	12.81	4.63	7.25	7.25	5.00	8.50	5.00	12.19	1.75	6.75	8.75
		14.75	7.31	5.38		2 1/2" NPT	10.00												
4002	2-lobe	12.94	6.25	3.69		1 1/2" NPT	7.25												
		15.69	7.63	5.06	3.00	2 1/2" NPT	10.00	10.63	15.13	4.38	8.00	8.00	6.25	10.25	6.25	13.69	2.00	8.25	8.75
		17.44	8.50	5.94		3" NPT	11.75												
4005	3-lobe	15.69	7.63	5.31	2.75	2 1/2" NPT	10.00												
		17.44	8.50	6.19		3" NPT	11.75	11.56	15.13	5.13	8.00	8.00	6.25	10.25	6.25	13.69	2.00	8.25	8.75
5003	2-lobe	15.25	7.38	4.50		2 1/2" NPT	8.38												
		17.88	8.69	5.81	3.38	4" NPT	11.00	12.13	17.38	5.38	10.50	10.50	6.75	11.25	6.25	17.19	2.50	8.75	1.125
		20.88	10.19	7.31		4" NPT	14.00												
5006	3-lobe	17.88	8.69	6.13	3.13	4" NPT	11.06												
		20.88	10.19	7.63		4" NPT	14.08	13.25	17.38	6.50	10.50	10.50	6.75	11.25	6.25	17.19	2.50	8.75	1.125
6005	2-lobe	18.75	9.44	5.63		3" NPT	10.13	15.06		6.25									
		21.75	10.94	7.13	3.69	5" NPT	13.13	15.06	21.69	6.25	17.00	11.00	8.75	14.75	8.75	19.81	3.00	11.75	1.375
		28.75	14.44	10.63		6" FLG	20.13	16.44		7.50									

Values shown are approximate and should not be used for construction. Certified drawings are available through your local Tuthill Vacuum & Blower Systems Sales Professional.

Your Local Tuthill Vacuum & Blower Systems Sales Professional:



**Tuthill Vacuum & Blower Systems**  
 4840 West Kearney Street  
 Springfield, Missouri USA 65803-8702  
 ☎ 417.865.8715 800.825.6937 f 417.865.2950  
 tuthillvacuumblower.com



TH-044 04/14