




Used Positive Displacement Blower, Sutorbilt 3 LR

SPECIFICATIONS

Dimensions: 16" x 17" x 12"

Weight: 132 Lbs. (Blower Only)

Brand: Sutorbilt
Model: 3LP
Max Pressure: 7 PSI
Max Vacuum: 14" Hg
Max Air Flow: 350 CFM
Max T: 260°F
Shaft Diameter: 3/4"
RPM: 1091 - 3600

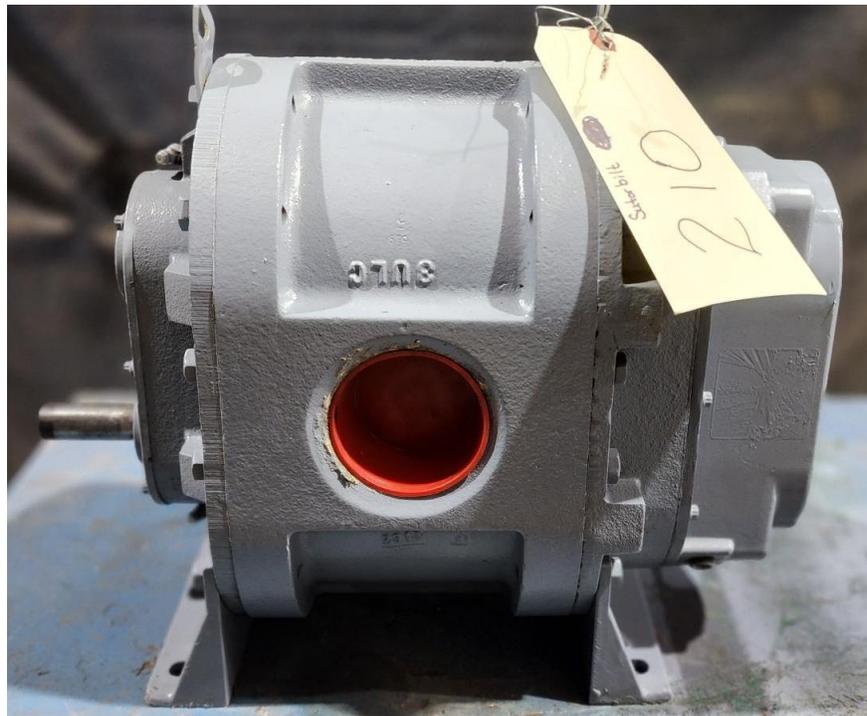



Enviro-Equipment, Inc.

Remediation Division

Pressure

SIZE	DIA. INLET & OUTLET	DISPL. CU. FT./REV.	RPM	2 PSIG		3 PSIG		4 PSIG		5 PSIG		6 PSIG		7 PSIG	
				CFM	BHP	CFM	BHP								
3LR 3LVR	2½"-S	0.104	1,760	149	1.9	142	2.8	135	3.7	130	4.5	124	5.2	120	6.1
			2,265	202	2.4	194	3.5	188	4.7	182	5.6	177	6.7	172	7.8
			2,770	254	2.9	247	4.3	240	5.5	235	6.8	230	8.2	225	9.6
			3,600	341	3.7	333	5.3	327	7.1	321	8.9	316	10.6	311	12.4

Vacuum

SIZE	DIA. INLET & OUTLET	DISPL. CU. FT./REV.	RPM	2 "Hg		4 "Hg		8 "Hg		10 "Hg		12 "Hg		14 "Hg	
				CFM	BHP	CFM	BHP	CFM	BHP	CFM	BHP	CFM	BHP	CFM	BHP
3LR 3LVR	2½"-S	0.104	1,760	158	1.1	147	1.9	128	3.6	118	4.5	108	5.1		
			2,265	211	1.3	200	2.4	180	4.6	171	5.5	160	6.6		
			2,770	264	1.5	252	2.9	233	5.4	223	6.7	213	8.1		
			3,600	350	1.9	338	3.7	319	7.0	309	8.7	299	10.5	288	12.2

Vertical Configurations

SIZE	WT.	CONN.	A	B	C	D	E	F	G	H	J	K	L	M	N	O	P	R	S	T	U
3LV	132	S	10.25	4.44	2.68	7.75	4.50	6.25	8.00	11.88	7.76	2.50	7.61	15.55	7.00	2.05	1.62	0.19	0.7500	0.25	0.62 x 1.12

